




	Document/File name DSC307820E	Document Type External	Revision 2
First Revision, Sign and Date Bln 2012-10-17	Updated Revision, Sign and Date Bln 2013-05-12	Document Status and Sign Approved Lan	Page 1 (1)
Document and Product Description Description Gearshift Load Cell GSS5/500-5KP and GSS12/500-5KP			

**GSS5/500-5KP Part # 30-782-0 (5V Supply)
GSS12/500-5KP Part # 30-788-4 (12V Supply)**

Gearshift Load Cells with fitted waterproof SureSeal connector.

The typical application is for use as: Flat Shift / Quick shifter / Torque Cut / Ignition Cut / Clutch free Gearshift on race vehicles. The load cells are generally installed into the actuator rod or cable and will detect the level of force applied by the driver to change gear.

GSS5/500-5KP and GSS12/500-5KP	0,5 m DR25	3-pole SureSeal Female connector
--------------------------------	------------	----------------------------------

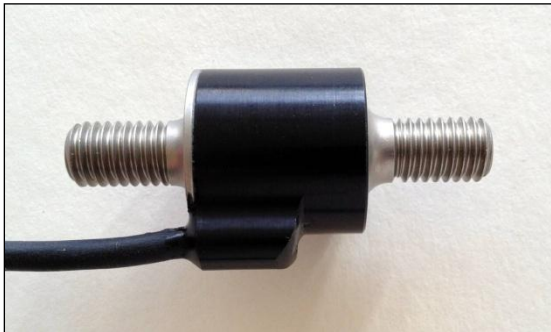

Range: +/-500N
Supply: 5V or 12V (8-16V) depending on type
Output: 0.5 to 4.5V
Mounting thread: M8x1.25 LH/RH
Weight: 49 grams

Connector: 3-pole SureSeal Female

Cable Length: 500mm
 Marking: Pnr & Snr Length: 30mm
 Clear crimp tube over marking length: 45mm Type: 6 / 2
 Crimp tube length: 50mm Type: DR25 4,8 / 2,4
 Crimp tube length: 30mm Type: ATUM 9 / 3

Con 1 (socket) - Gnd
 Con 2 (pin) – Supply. 5V or 12V (8-16V) depending on type
 Con 3 (pin) - Signal

