



Document/File name DSC126498E	Document Type External	Revision 5
First Revision, Sign and Date Bln 2009-03-29	Updated Revision, Sign and Date Bln 2020-03-19	Document Status and Sign Approved Lan
Document and Product Description Communication cable RS232 for TTT802 Pnr. 12-649-8		Page 1 (1)

Part # 12-649-8

Professional communication cable with fitted Sureseal connector and 9-pole Dsub with metal housing. For the TTT802 Gearshift Controller.

Custom lengths and/or connectors on request.

Weight:

Aprox: 110 grams




Com	1,5 m	3-pole SureSeal Female
------------	-------	------------------------

Cable colors/connection:

Com Connector: 3-pole SureSeal Female

Cable Length: 1500mm
Marking: Pnr & Batch nr Length: 30mm
Clear crimp tube over marking length: 45mm Type: 6 / 2
Crimp tube length: 30mm Type: ATUM 9 / 3
Blue – con 1 (socket) - Gnd
Red – con 2 (pin) - Signal Tx from TTT802
Green – con 3 (pin) - Signal Rx on TTT802

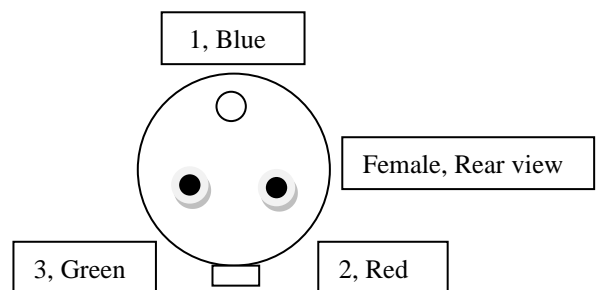


Com Connector: 9-pole Dsub Female

Red – con 2 - Signal Tx from TTT802 / Rx on Computer
Green – con 3 - Signal Rx on TTT802 / Tx on Computer
Blue – con 5 - Gnd

Note: Older produced cables had different wire colors/connection:

Com Connector: 3-pole SureSeal Female

Cable Length: 1500mm
Marking: Pnr & Snr Length: 30mm
Clear crimp tube over marking length: 45mm Type: 6 / 2
Crimp tube length: 30mm Type: ATUM 9 / 3
Crimp tube length: 60mm Type: DR25 4.8 / 2.4
Black – con 1 (socket) - Gnd
Blue or Yellow – con 2 (pin) - Signal Tx from TTT802
Brown or Green – con 3 (pin) - Signal Rx on TTT802

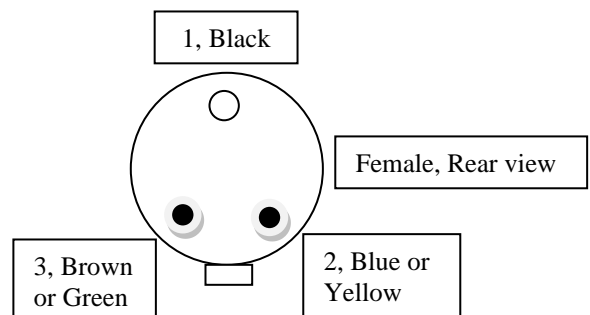

Com Connector: 9-pole Dsub Female

Blue or Yellow – con 2 - Signal Tx from TTT802 / Rx on Computer
Brown or Green – con 3 - Signal Rx on TTT802 / Tx on Computer
Black – con 5 - Gnd