




Document/File name DSC401104E.docx	Document Type External	Revision 2
First Revision, Sign and Date Bln 2010-03-22	Updated Revision, Sign and Date Bln 2015-02-16	Document Status and Sign Approved Lan
Document and Product Description Mounting brackets for 8mm sensor on Tractive gearlever.		Page 1 (1)

The kit consists of a stainless bracket, adjust/locking screw and steel extender sensor flag. It comes in two different types. The Standard type, 40-110-4, have the sensor flange to the right and the "Inverted" type, 40-112-2, have the sensor flange to the left.



The M6 adjust/locking screw for the bracket fits in the existing hole on the lever assembly. On recent production this hole is already completely threaded, but on earlier lever assemblies it is only threaded from one side and not completely through. So of course, this needs to be fixed before the sensor can be mounted.

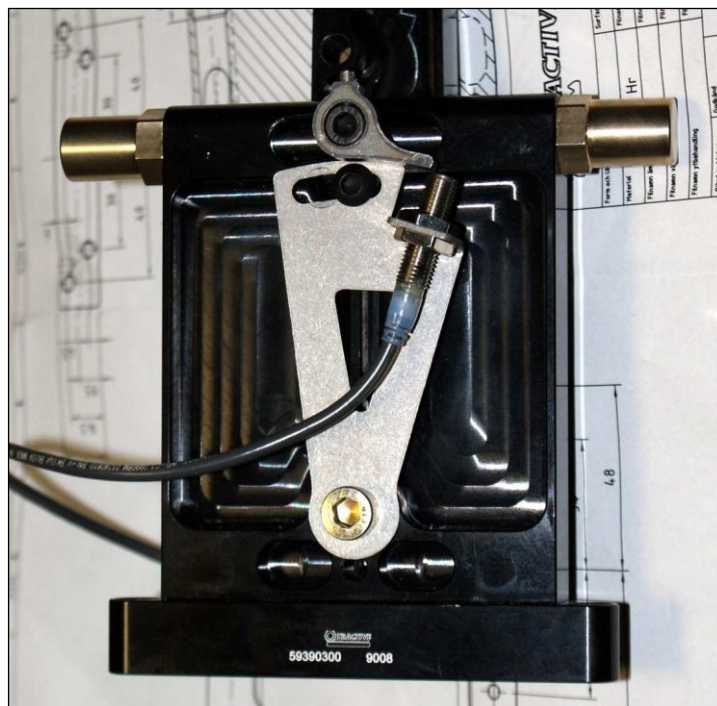

Tractive gearlever with mounting bracket 40-110-4 and sensor 30-521-9