



Document/File name DSC126498E	Document Type External	Revision 3
First Revision, Sign and Date Bln 2009-03-29	Updated Revision, Sign and Date Bln 2012-11-28	Document Status and Sign Approved Lan
Document and Product Description Description Communication cable RS232 for TTT802 Pnr. 12-649-8		Page 1 (1)

Part # 12-649-8

Professional communication cable with fitted Waterproof connector and 9-pole Dsub with metal housing. For the TTT802 Gearshift Controller.

Custom lengths and/or connectors on request.

Weight:

105 grams

Com	1,5 m	3-pole SureSeal Female
------------	-------	------------------------



Com Connector: 3-pole SureSeal Female

Cable Length: 1500mm

Marking: Pnr & Snr Length: 30mm

Clear crimp tube over marking length: 45mm Type: 6 / 2


Crimp tube length: 30mm Type: ATUM 9 / 3

Crimp tube length: 60mm Type: DR25 4.8 / 2.4

Black – con 1 (socket) - Gnd

Blue or Yellow – con 2 (pin) - Signal Tx from TTT802

Brown or Green – con 3 (pin) - Signal Rx on TTT802

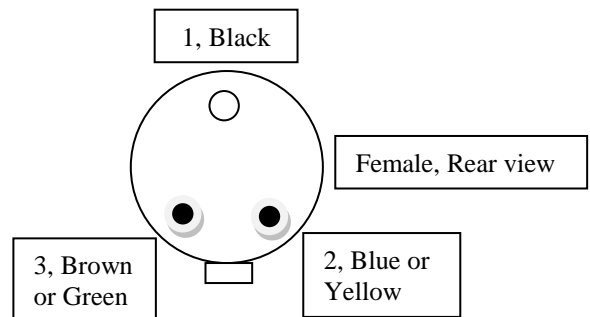

Com Connector: 9-pole Dsub Female

Blue or Yellow – con 2 - Signal Tx from TTT802 / Rx on Computer

Brown or Green – con 3 - Signal Rx on TTT802 / Tx on Computer

Black – con 5 - Gnd